


W20-1
48" x 48"



W20-4
48" x 48"



W20-7a(1)
48" x 48"




NOTE: ACCESS POINTS WITHIN LANE CLOSURE SHALL BE CONTROLLED BY FLAGGER(S)

REFER TO TCP 100.01 FOR SIGN SPACING, TAPER LENGTHS AND BUFFER ZONE LENGTHS

W20-7a(1)
48" x 48"



W20-1
48" x 48"

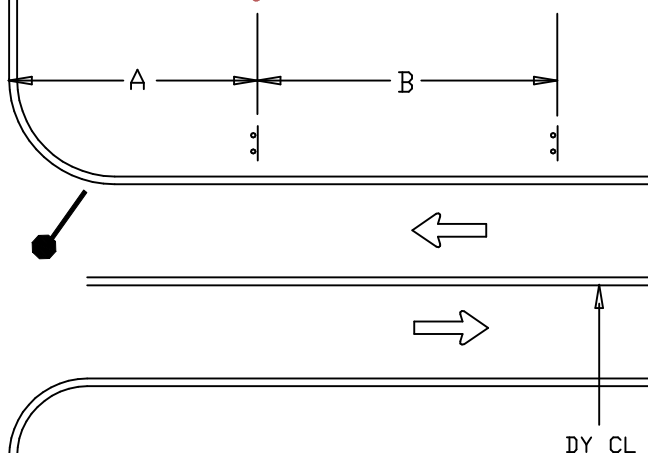

S²

S¹

WORK AREA

BUFFER

50' TO 100'



DY CL



W20-7a(1)
48" x 48"



W20-4
48" x 48"



W20-1
48" x 48"



DIRECTION OF TRAFFIC



SIGN



WORK SITE



FLAGGER



TRAFFIC DRUMS OR CONES

S¹=30 FT.

S²=10 FT.

REVISION BY	DATE	APPROVED

DATE	TRAFFIC OPERATIONS SECTION	
07-01-04	MONTGOMERY COUNTY, MARYLAND	
DES. BY		
MCDPWT	FLAGGING CONTROL AT	
DRAWN BY	3 - LEG INTERSECTION (2)	
TCLE	APPROVED	
SCALE	_____ CHIEF, TRAFFIC OPERATIONS SECTION	
NTS	STANDARD TCP-105.04	___ OF ___ SHEETS